

DIMMABLE DOWNLIGHT RETROFIT FOR EXISTING FIXTURES AND NEW CONSTRUCTION SURFACE MOUNT, THREE ADJUSTABLE CCT IN ONE FIXTURE



GA-HM-02-6W

DOWN-LIGHT / 400LM /
AC120V / 6W/ IP 20
ADJUSTABLE CCT SWITCH:
3000K/4000K/5000K
80,000 Hours, 6W, Driver Inside,
120 Degree Light Angle
Round (02)
New construction or
4" housing Retrofit
Fixture Diameter 5"
AC 120V
**Dimmable, available
frame trim colors:**
X= white(W), Black(B), Nickel (N)



GA-HM-XX-12W

DOWN-LIGHT / 1000LM /
AC120V / 12W// IP 20
ADJUSTABLE CCT SWITCH:
3000K/4000K/5000K
80,000 Hours, 12 W, Driver
Inside, 120 Degree Light Angle
XX =Round (02) or Square (05)
New construction or
5/6" housing Retrofit
Fixture Diameter 7"
AC 120V
**Dimmable, available
frame trim colors:**
X= white(W), Black(B), Nickel (N)



GA-HM-XX-18W

DOWN-LIGHT / 1530 LM /
AC120V / 18W/ IP 20
ADJUSTABLE CCT SWITCH:
3000K/4000K/5000K
80,000 Hours, 18 W, Driver
Inside, 120 Degree Light Angle
XX= Round (02) or Square (05)
New construction or
5/6" housing Retrofit
Fixture Diameter 9"
AC 120V
**Dimmable, available
frame trim colors:**
X= white(W), Black(B), Nickel (N)



GA-HM-XX-24W


DOWN-LIGHT/ 2160LM /
AC120V / 24W/ IP 20
ADJUSTABLE CCT SWITCH:
3000K/4000K/5000K
80,000 Hours, 24 W, Driver
Inside, 120 Degree Light Angle
XX= Round (02) or Square (05)
New construction or
5/6" housing Retrofit
Fixture Diameter 12"
AC 120V
**Dimmable, available
frame trim colors:**
X= white(W), Black(B), Nickel (N)

PRODUCT DETAILS

Top of luminaire



Back of luminaire

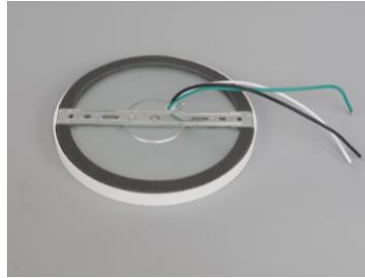

Retrofit installation



Retrofit installation



Surface mounted installation

